

Thank you for purchasing this Dynojet kit. This kit has been developed for a motorcycle which is set to the parameters listed at the right in the "Stage" description. If your motorcycle does not meet any of these parameters please check with Dynojet before installation. For technical assistance contact your Dynojet distributor or call Dynojet U.S.A. (800)-992-4993

2191 Mendenhall Dr. Suite 105
 North Las Vegas, NV 89081
 TEL: 702-399-1423
 FAX: 702-399-1431
 8am-5pm Pacific Time
 Monday through Friday

Website Address
<http://www.dynojet.com>

The manufacturer and seller make no warranties express or implied which extend beyond the description of the goods contained herein. Any description of this product is for the purpose of identifying it and shall not be deemed to create an express warranty.



1169.001

U.S Models Only


**2009 Honda CRF230M
 Stage 1 & 2**

Stage 1

For mildly tuned machines using the stock airbox, with stock air filter. May also be used with a good aftermarket exhaust system.

Stage 2

For mildly tuned machines using the stock airbox with the lid removed and stock air filter. May also be used with a good aftermarket exhaust system.

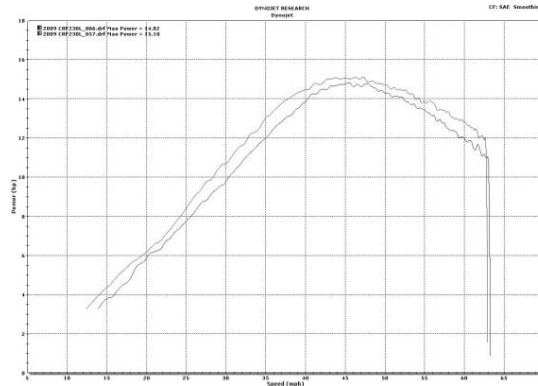

This graph shows a typical gain with a Dynojet jet kit.

WARNING

**NO SMOKING!
 NO OPEN FLAME!
 WHILE INSTALLING
 YOUR DYNOJET KIT**


Parts List

| | | |
|---|------------------|--------|
| 1 | Main Jet | DJ110 |
| 1 | Main Jet | DJ114 |
| 1 | Main Jet | DJ118 |
| 1 | Main Jet | DJ120 |
| 1 | Main Jet | DJ124 |
| 1 | Main Jet | DJ128 |
| 1 | Main Jet | DJ132 |
| 1 | Fuel Needle | DNO150 |
| 1 | Adjusting Washer | DW0001 |
| 1 | E-clip | DE0001 |
| 1 | Tool | DT009 |

STAGE ONE INSTRUCTIONS

1. Remove the vacuum slide from the carb. Remove the stock needle and spacers, noting the order of assembly (Fig. A).
2. Install the Dynojet needle on groove #3 from the top. Use all stock spacers (Fig. A). Install the small Dynojet washer above the e-clip. After installing the slide in the carb, be sure to check slide movement manually.
3. Remove the stock main jet and replace with the Dynojet main jet provided. If you are running the stock exhaust, use the DJ114 main jet. If you are using an aftermarket exhaust or slip-on with a high flow baffle, use the DJ118 main jet. Be sure that the jet you are changing is the main jet.
4. Locate the fuel mixture screw (Fig. B). The mixture screw is located on the left side of the carb. Using the tool provided (DT009), carefully turn the mixture screws clockwise until lightly seated, then turn back out 2.5 turns.

Fig. A

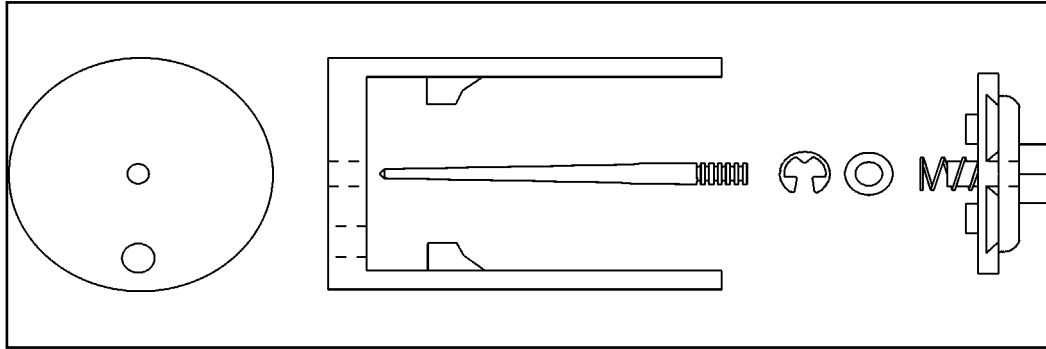

STAGE TWO INSTRUCTIONS

1. Remove the lid from the airbox. Make sure that the air filter is secured tightly in the airbox.
2. Remove the vacuum slide from the carb. Remove the stock needle and spacers, noting the order of assembly (Fig. A).
3. Install the Dynojet needle on groove #3 from the top. Use all stock spacers (Fig. A). Install the small Dynojet washer above the e-clip. After installing the slide in the carb, be sure to check slide movement manually.
4. Remove the stock main jet and replace with the Dynojet main jet provided. If you are running the stock exhaust, use the DJ124 main jet. If you are using an aftermarket exhaust or slip-on with a high flow baffle, use the DJ128 main jet. Be sure that the jet you are changing is the main jet.
5. Locate the fuel mixture screw (Fig. B). The mixture screw is located on the left side of the carb. Using the tool provided (DT009), carefully turn the mixture screws clockwise until lightly seated, then turn back out 2.5 turns.

Dynojet

1169.001




Fig. B

